

KATALOG

OASIS

OASIS



Head Office

PT BAGDU UTAMA MANDIRI
Ruko The Icon, Horizon Broadway M2/20
BSD City, Tangerang, Banten, 15345



OASIS BARRIER WASHER

OGL-350FDQ



SPECIFICATION

Capacity : 35 kg

Inner Drum

Diameter : $\varnothing 774$ mm

Depth : 726 mm

Volume : 342 lt

Dimension

Width : 1290 mm

Depth : 1100 mm

Height : 1500 mm

Loading Door

Width : 820 mm

Speed

Wash : 45 r.p.m

High Spin : 650 r.p.m

Noise : 70 db

Power

Drive Motor : 4 kW

Power Supply : AC380V50HZ

Pipeline

Water Outlet : 75mm

Cold & Hot Water Inlet : 1" inch

Water Pressure : 0.15-0.25 MPa

Soap Inlet : 3/4" inch

Steam Inlet : 1/2 "inch

Steam Pressure : 0. 45-0. 55MPa

Compressed Air : 8 mm

Compressed Air Pressure : 0.6 MPa

Weight : 820 kg

OASIS BARRIER WASHER

OGL-600FDQ



SPECIFICATION

Capacity : 60 kg

Inner Drum

Diameter : ϕ 1065 mm

Depth : 760 mm

Volume : 677 lt

Dimension

Width : 1592 mm

Depth : 1448 mm

Height : 2035 mm

Loading Door

Width : 791 mm

Speed

Wash : 30 r.p.m

High Spin : 650 r.p.m

Noise : 70 db

Power

Drive Motor : 7.5 kW

Power Supply : AC380V50HZ

Pipeline

Water Outlet : 125 mm

Cold & Hot Water Inlet : 1.5" mm

Water Pressure : 0.15-0.25 MPa

Soap Inlet : 3/4" inch

Steam Inlet : 1" inch

Steam Pressure : 0.45-0.55MPa

Compressed Air : 8 mm

Compressed Air Pressure : 0.6M Pa

Weight : 2390 kg

OASIS WASHER EXTRACTOR

SXT-250FD(Z)Q



SPECIFICATION

MODEL

Basket Capacity	: 25 kg
Volume	: 251 liter
Depth	: 534 mm
Diameter	: 774 mm

SPEED OF BASKET

Wash Speed	: 45 r.p.m
Spin Speed	: 860 r.p.m
G-Force	: 320 G

PIPELINE

Cold Water Inlet	: 3/4 inch
Hot Water Inlet	: 3/4 inch
Soap Inlet	: 3/4 inch
Water Outlet	: ϕ 76 or ϕ 76 inch
Steam Inlet	: 1/2 inch

PRESSURE

Steam Pressure	: 0.4 - 0.5 MPa
Water Pressure	: 0.15 - 0.4 MPa

LOADING DOOR

Diameter	: 539 x 539 inch
Door Center Height	: 880 mm

POWER

Motor	: 2.2 kW
Inverter	: 2.2 kW
Electric Heater	: 15 kW

CONSUMPTION

Water per Cycle	: 400 liter
Power	: 0.8(S)-5(E)kwh/h
Steam per Cycle	: 20 kg/h

CONTOUR DIMENSION

Width	: 1038 mm
Depth	: 1154 mm
Height	: 1466 mm
Net Weight	: 720 kg

OASIS WASHER EXTRACTOR

SXT-600FDQ



SPECIFICATION

MODEL

Basket Capacity	: 60 kg
Volume	: 565 liter
Depth	: 620 mm
Diameter	: 1078 mm

SPEED OF BASKET

Wash Speed	: 44 r.p.m
Spin Speed	: 760 r.p.m
G-Force	: 350 G

PIPELINE

Cold Water Inlet	: 1½ inch
Hot Water Inlet	: 1½ inch
Soap Inlet	: ¾ inch
Water Outlet	: ø125 inch
Steam Inlet	: 1 inch

PRESSURE

Steam Pressure	: 0.4 - 0.5 MPa
Water Pressure	: 0.15 - 0.4 MPa

LOADING DOOR

Diameter	: ø690 inch
Door Center Height	: 1184 mm

POWER

Motor	: 5.5-7.5 kW
Inverter	: 5.5-7.5 kW
Electric Heater	: 30 kW

CONSUMPTION

Water per Cycle	: 800 Lt
Power	: 1(S)-7(E) kwh/h
Steam per Cycle	: 30 kg/h

CONTOUR DIMENSION

Width	: 1619 mm
Depth	: 1500 mm
Height	: 1962 mm
Net Weight	: 1960 kg

OASIS TUMBLE DRYER



HG-500DQ


SPECIFICATION

Capacity	
Max	: 25 kg
Diameter	: 953 mm
Depth	: 772 mm
Drive Motor Power	: 0,75 Kw
Fan Motor Power	: 1,1 Kw
Electric Heater Power	: 30 Kw
Power Consumption	: 30 Kw/Cycle
Steam Pressure	: 0.4-0.6 MPa
Steam Inlet	: 1/2 inch
Water Outlet	: 1 inch
Steam Consumption	: 30 Kg/Cycle
Exhaust Air Flow	: 2000 M ³ /H
Gas Inlet	: 1/2 inch
Gas Consumption	: 0,8 M ³ /Cycle
Exhaust Connection	: ø200
Width	: 1040 mm
Depth	: 1165 mm
Height	: 1910 mm
Net Weight	: 400 Kg

HG-1000DQ

SPECIFICATION

Capacity	
Max	: 50 kg
Diameter	: 1136 mm
Depth	: 954 mm
Drive Motor Power	: 1,5 Kw
Fan Motor Power	: 1,1 Kw
Electric Heater Power	: 45 Kw
Power Consumption	: 50 Kw/Cycle
Steam Pressure	: 0.4-0.6 MPa
Steam Inlet	: 1 inch
Water Outlet	: 1 inch
Steam Consumption	: 60 Kg/Cycle
Exhaust Air Flow	: 3200 M ³ /H
Gas Inlet	: 3/4 inch
Gas Consumption	: 3,2 M ³ /Cycle
Exhaust Connection	: ø250
Width	: 1335 mm
Depth	: 1650 mm
Height	: 2092 mm
Net Weight	: 680 Kg

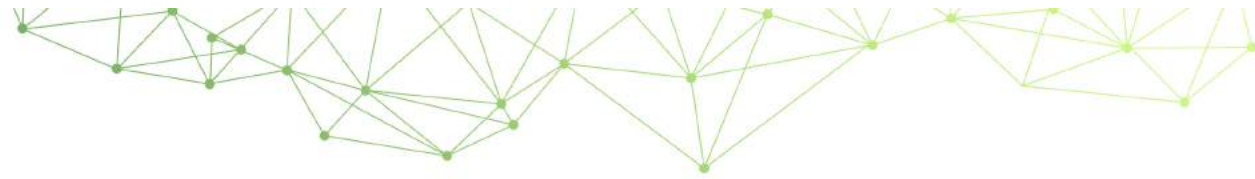

FLATWORK IRONING MACHINE

SPECIFICATION

YP-2800ID


Max Ironing Width	: 2800 mm
Ironing Speed	: ≤10m/min
Heating power of electrothermal tube	: 30 kw/h
Highest ironing temperature	: 200 °C
Frequency converter	: 0.75 kW
Motor power	: 0.75 kW
Dimensions (LxWxH)	: 3750 x 1280 x 1250
Machine weight	: 1400 kg



YP-2800IIZ

Quantity of roller	: Double Roll
Max ironing width	: 2800 mm
Ironing speed	: 0-20 mm/min
Steam pressure	: 40.4-0.6 Mpa
Highest ironing temperature	: 158 °C
Steam consumption	: ≤170 kg/h
Steam interface	: ZG1
Hydrophobic interface	: ZG 3/4
Motor power	: 1.5 kW
VFD capacity	: 1.5 kW
Dimension (LxWxH)	: 3750 x 2230 x 1250
Total Weight	: 2500 kg



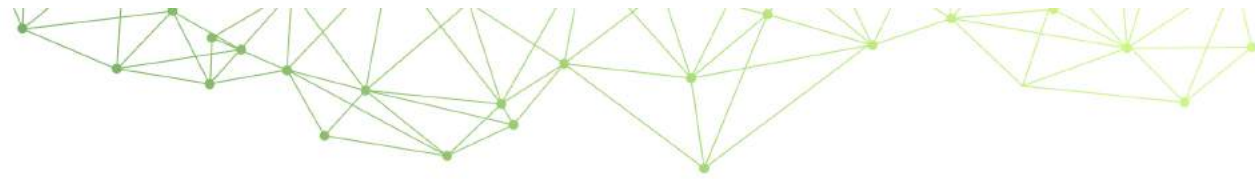

LINEN PRESS

GMJ-Z



SPECIFICATION

Part of pressing	: Utility manual
Steam pressure	: 0.4-0.5Mpa
Steam consumption	: 25kg/h
Compressed air pressure	: 0.4-0.5Mpa
Size	: 1350x1400x1300
Weight	: 350 kg
Fitting	: Steam boiler air compressor

Contact Us:

-  Telp: 021 - 5319 2008
-  WhatsApp: +62 813-8551-7208
-  E-mail : info@bagdu.id
-  Website : bagdu.id

Head Office

PT BAGDU UTAMA MANDIRI
Ruko The Icon, Horizon Broadway M2/20
BSD City, Tangerang, Banten, 15345